

H13 TOOL STEEL (X40CRMOV5-1)

H13 toolsteel exhibits high strength at elevated temperatures, it also has high hot wear resistance, good toughness, thermal conductivity and resistant to hot cracking, limited water cooling possible. Applications: Standard material for hot forming tools, extrusion tools, forging dies, pressure casting tools, hot shear knives, tools for plastic industry. Also available in EFS and ESR condition where better properties are required.

Colour Code	Stocked Sizes	
Yellow/Green/Blue 	Rounds	20 mm - 523 mm Dia
	Flats	120 mm x 70 mm - 176 mm x 105 mm
Condition of Delivery		
Soft annealed to max. 229 HB		

Related Specifications

Germany	DIN 1.2344
USA	AISI H13

Chemical Composition

	%
Carbon	0.40
Chromium	5.30
Molybdenum	1.40
Vanadium	1.00

Physical Properties

Thermal expansion coefficient	$\left[\frac{10^{-6} \text{ m}}{\text{m K}} \right]$	20-100°C	20-300°C	20-500°C	20-700°C
		10,8	12,3	13,0	13,5
Thermal conductivity	$\left[\frac{\text{W}}{\text{m K}} \right]$	20°C	350°C	700°C	
		25,6	28,4	29,4	

Heat Treatment

Soft Annealing

Temperature	750 - 800°C
Cooling	furnace
Hardness	max 229 HB


Stress Relief Annealing

Temperature	600 - 650°C
Cooling	furnace


Hardening

Temperature	1020 - 1060°C
Cooling	oil, pressure gas (N ₂) air or hot bath 500 - 550°C
Hardness	see tempering diagram


Thermal Cycle Diagram

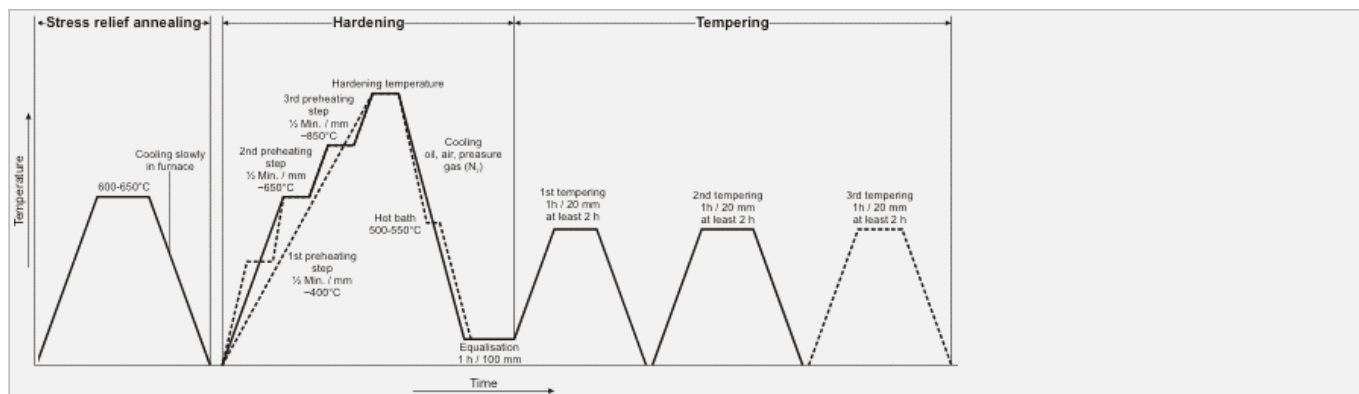

Continuous Cooling Transformation Diagram (CCT)

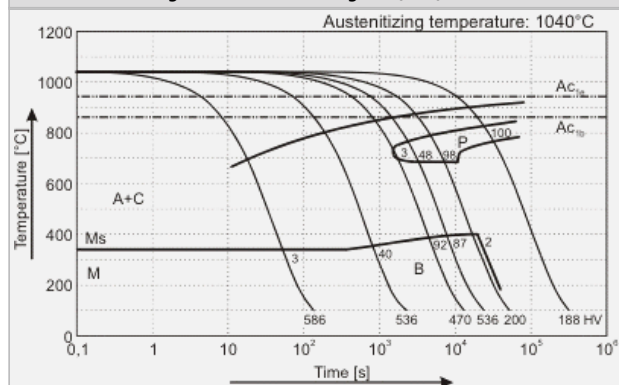

Tempering Diagram

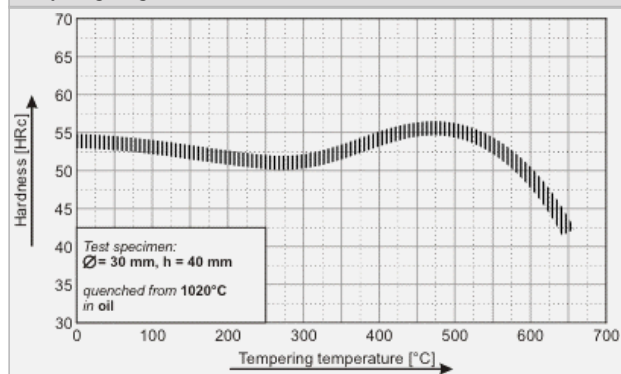

Interlloy believes the information provided is accurate and reliable. However no warranty of accuracy, completeness or reliability is given, nor will any responsibility be taken for errors or omissions.